


REF	TRT (Tubo ext.)			EVA (Tubo int.)		Varilla de Acero	
	D1 +0.1 max	D2 +0.1 max	A ± 1	d1 ± 0.1	B ± 1	d2 ± 0.1	C ± 1
PFO-23	3.1	3	23	1.2	22	1.5	18
PFO-40	3.1	3	40	1.2	39	1.5	35
PFO-40-F	2.6	2.5	40	1.2	39	1	35
PFO-45	3.1	3	45	1.2	44	1.5	40
PFO-45-FE	2.7	2.6	45	1.2	43	1	38
PFO-45-G	3.6	3.5	45	1.98	44	1.5	40
PFO-61	3.1	3	61	1.2	60	1.5	55
PFO-61-F	2.6	2.5	61	1.2	60	1	55
PFO-61-G	3.6	3.5	61	1.98	60	1.5	55
PFO-68	3.1	3	68	1.2	67	1.5	61
PFO-68-F	2.7	2.6	68	2.2	67	1	61
PFO-68-GT	3.6	3.5	68	1.98	61	1.5	56

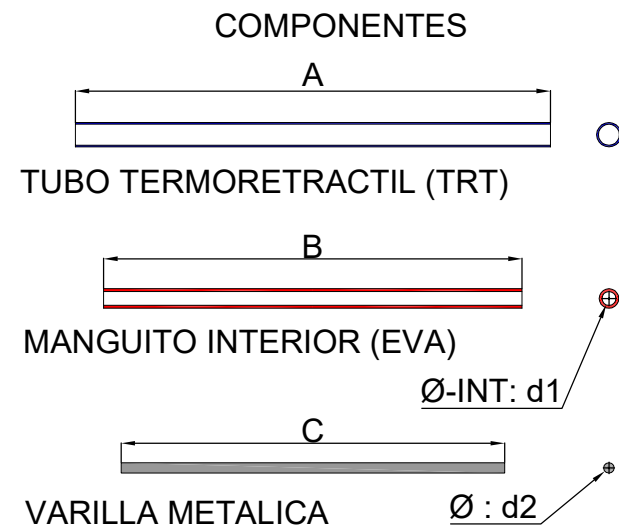

TOL. GEN. DIN 7168	>0.5 a 6	>6 a 30	>30 a 120	>120 a 315	>315 a 1000	>1000 a 2000	Angles ± 0.5	Version	Sheet size	Drawn	PFO		Material TRT poliolefina EVA manguito int VARILLA acero inoxidable		
	± 0.05	± 0.1	± 0.15	± 0.2	± 0.3	± 0.5		R04	A3	A. Amore	Part name	Project			
	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2			Sheet number	Checked	Date	Fiber optic splice protector			This drawing contains confidential information. Not allowed its reproduction total or partial All dimensions in metric system
	± 0.2	± 0.5	± 0.8	± 1.2	± 2	± 3			1/1	-	10/05/19				