


HOLE IN P.C.B Ø3.3  
P.C.B THICKNESS 1.6



HOLE IN P.C.B Ø3.3  
P.C.B THICKNESS 1.6

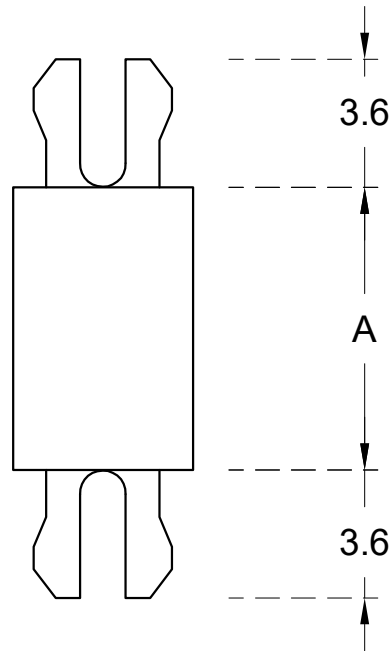

| REF      | A    | B     |
|----------|------|-------|
| SARE-080 | 8.0  | 17.35 |
| SARE-175 | 17.5 | 26.3  |

| TOL. GEN. DIN 7168 | >0.5          | >6             | >30             | >120            | >315             | >1000            | Angles<br>± 0.5 | Version      | Sheet size | Drawn    | SARE           |                | Material  | Color         | Finish |
|--------------------|---------------|----------------|-----------------|-----------------|------------------|------------------|-----------------|--------------|------------|----------|----------------|----------------|---|---------------|--------|
|                    | $\frac{a}{6}$ | $\frac{a}{30}$ | $\frac{a}{120}$ | $\frac{a}{315}$ | $\frac{a}{1000}$ | $\frac{a}{2000}$ |                 | R04          | A3         |          | Part name      | Project        | Nylon 66 (UL 94V-2)   | Natural/Black |        |
| □ FIND             | ± 0.05        | ± 0.1          | ± 0.15          | ± 0.2           | ± 0.3            | ± 0.5            |                 | Sheet number | Checked    | Date     | ANCHOR SUPPORT | SPACER SUPPORT | This drawing contains confidential information.<br>Not allowed its reproduction total or partial<br>All dimensions in metric system |               |        |
| □ MEDIO            | ± 0.1         | ± 0.2          | ± 0.3           | ± 0.5           | ± 0.8            | ± 1.2            |                 | 1/1          | -          | 30/04/19 |                |                |   |               |        |
| □ BASTO            | ± 0.2         | ± 0.5          | ± 0.8           | ± 1.2           | ± 2              | ± 3              |                 |              |            |          |                |                |   |               |        |