
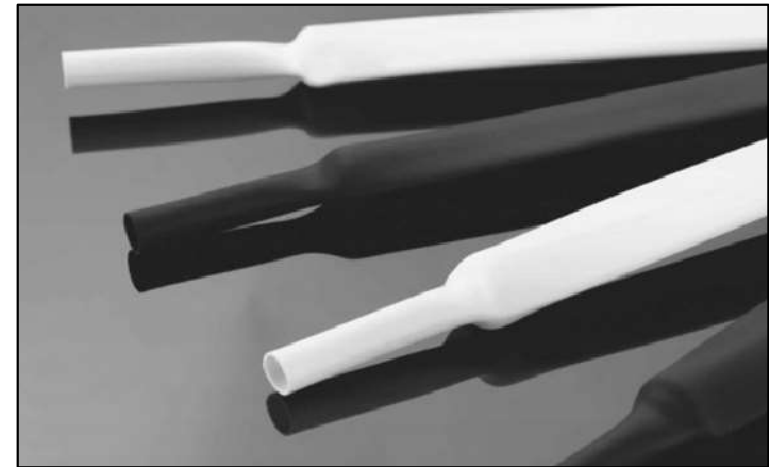


(as supplied)

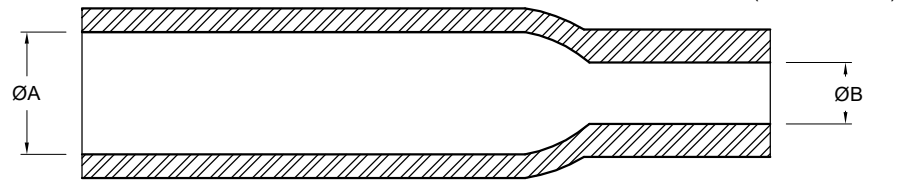

Features:

Shrink ratio: 2:1

Halogen free

Meets:UL224 E204071(Black)

Operating temp.: -55°C to +125°C

Min. full recovery temp.: 100

RosHS compliant

Voltage rating : 600V

Flame retardant VW-1

UV resistant

REF	TRT-HF-1.2	TRT-HF-1.6	TRT-HF-2.4	TRT-HF-3.2	TRT-HF-4.8	TRT-HF-6.4	TRT-HF-8.0	TRT-HF-9.5
ØA (as supplied)	1.2	1.6	1.6	3.2	4.8	6.4	8.0	9.5
ØB (after recovered)	0.6	0.8	1.2	1.6	2.4	3.2	4.0	4.8

REF	TRT-HF-12.7	TRT-HF-19.1	TRT-HF-25.4	TRT-HF-31.8	TRT-HF-38.1	TRT-HF-50.8	TRT-HF-76.2	TRT-HF-101.6
ØA (as supplied)	12.7	19.1	25.4	31.8	38.1	50.8	76.2	101.6
ØB (after recovered)	6.4	9.5	12.7	15.9	19.1	25.4	38.1	50.8

TDL_GEN.DIN 7168	>0.5 a 6	>6 a 30	>30 a 120	>120 a 315	>315 a 1000	>1000 a 2000	Angles ± 0.5	Version	Sheet size	Drawn	TRT-HF		Material	Color	Finish
	± 0.05	± 0.1	± 0.15	± 0.2	± 0.3	± 0.5		R04	A3		Part name	Project	Poliolefine	Black	Flat
	□ FIND ± 0.05	± 0.1	± 0.15	± 0.2	± 0.3	± 0.5		Sheet number	Checked	Date	SHRINKABLE CABLE PROTECTION	CABLE PROTECTION	This drawing contains confidential information. Not allowed its reproduction total or partial All dimensions in metric system		
□ MEDIO ± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2		1/1	-	07/06/19			E 040			
□ BASTO ± 0.2	± 0.5	± 0.8	± 1.2	± 2	± 3										