


(as supplied)

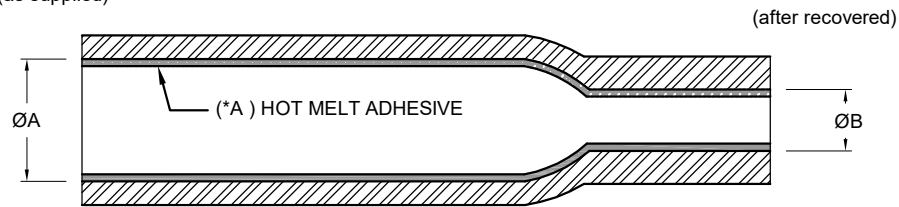

**Features:**

Shrink Ratio: 3:1

Operating temperature: -55°C to + 125°C

Approvals: UL 224 E204071

Minimum fully recovery temperature: 110°C

RosHS compliant

Voltage rating : 600V

Flame retardant VW-1 (except clear)

UV resistant (black)

REF	TRTA3-03.0	TRTA3-04.80	TRTA3-06.0	TRTA3-09.0	TRTA3-12.0	TRTA3-19.0	TRTA3-24.0	TRTA3-30.0	TRTA3-40.0	TRTA3-50.0
ØA (as supplied)	3	4.8	6	9	12	19	24	30	40	50
ØB (after recovered)	1	1.6	2	3	4	6.4	8	10	13.30	19
*A(adhesive thickness after fully recovered)	0.35	0.40	0.40	0.50	0.70	0.70	1.10	1.10	1.10	1.10

TOL_GEN.DIN 7168	>0.5 a 6	>6 a 30	>30 a 120	>120 a 315	>315 a 1000	>1000 a 2000	Angles ± 0.5	Version	Sheet size	Drawn	TRTA3		Material	Color	Finish
	± 0.05	± 0.1	± 0.15	± 0.2	± 0.3	± 0.5		R04	A3		Part name	Project			
<input type="checkbox"/> FIND	± 0.05	± 0.1	± 0.15	± 0.2	± 0.3	± 0.5		Sheet number	Checked	Date	SHRINKABLE CABLE	CABLE PROTECTION	This drawing contains confidential information. Not allowed its reproduction total or partial All dimensions in metric system		
<input type="checkbox"/> MEDIO	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2		1/1	-	11/06/19	PROTECTION				
<input type="checkbox"/> BASTO	± 0.2	± 0.5	± 0.8	± 1.2	± 2	± 3									

