


(as supplied)

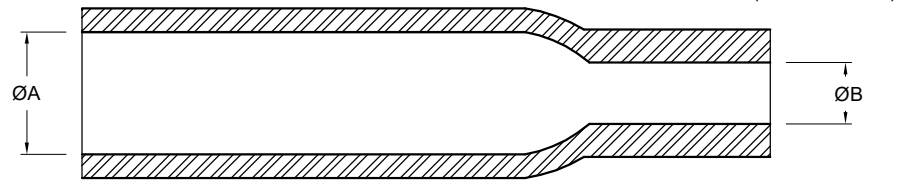

Features:

Shrink ratio 2:1

Very flexible

Aproveval UL 224,VW-1 E249362

Excellent resistance of chemicals

Operating temperature -40°C to 200°C

Minimum fully recovery temperature: 175°C

RosHS compliant

Voltage rating : 600V

Flame retardant VW-1



REF	TRT-H200-03.2	TRT-H200-04.8	TRT-H200-06.4	TRT-H200-09.5	TRT-H200-12.7	TRT-H200-19.1	TRT-H200-25.4
ØA (as supplied)	3.2	4.8	6.4	9.5	12.7	19.1	25.4
ØB (after recovered)	1.6	2.4	3.2	4.8	6.4	9.5	12.7

TDL_GEN.DIN 7168	>0.5 a 6	>6 a 30	>30 a 120	>120 a 315	>315 a 1000	>1000 a 2000	Angles ± 0.5	Version	Sheet size	Drawn	TRT-H200		Material	Color	Finish
	± 0.05	± 0.1	± 0.15	± 0.2	± 0.3	± 0.5		R04	A3		Part name	Project	Poliolefine	Black	Flat
	□ FIND ± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2		Sheet number	Checked	Date	SHRINKABLE CABLE PROTECTION	CABLE PROTECTION	This drawing contains confidential information. Not allowed its reproduction total or partial All dimensions in metric system		
□ MEDIO ± 0.2	± 0.5	± 0.8	± 1.2	± 2	± 3	1/1	-	07/06/19				E 010			

